

HDH304(IC/IS/OC/OS) DOME HOUSING

Wall / Ceiling Mount Housing

■ PRODUCT FEATURES

- Adjustment for speed dome
- In/Outdoor installation
- IP66 protection grade
- Wall or ceiling application
- Heater / Blower kit included

■ SPECIFICATIONS

• MODEL

Indoor Type

HDH304-IC (Clear Bubble, w/o SunShield)

HDH304-IS (Smoke Bubble, w/o SunShield)

Outdoor Type

HDH304-OC (Clear Bubble, with SunShield)

HDH304-OS (Smoke Bubble, with SunShield)


• GENERAL

Ambient Environment


Temperature : -45°C to 50°C

Ratings : IP66

■ APPLICATION

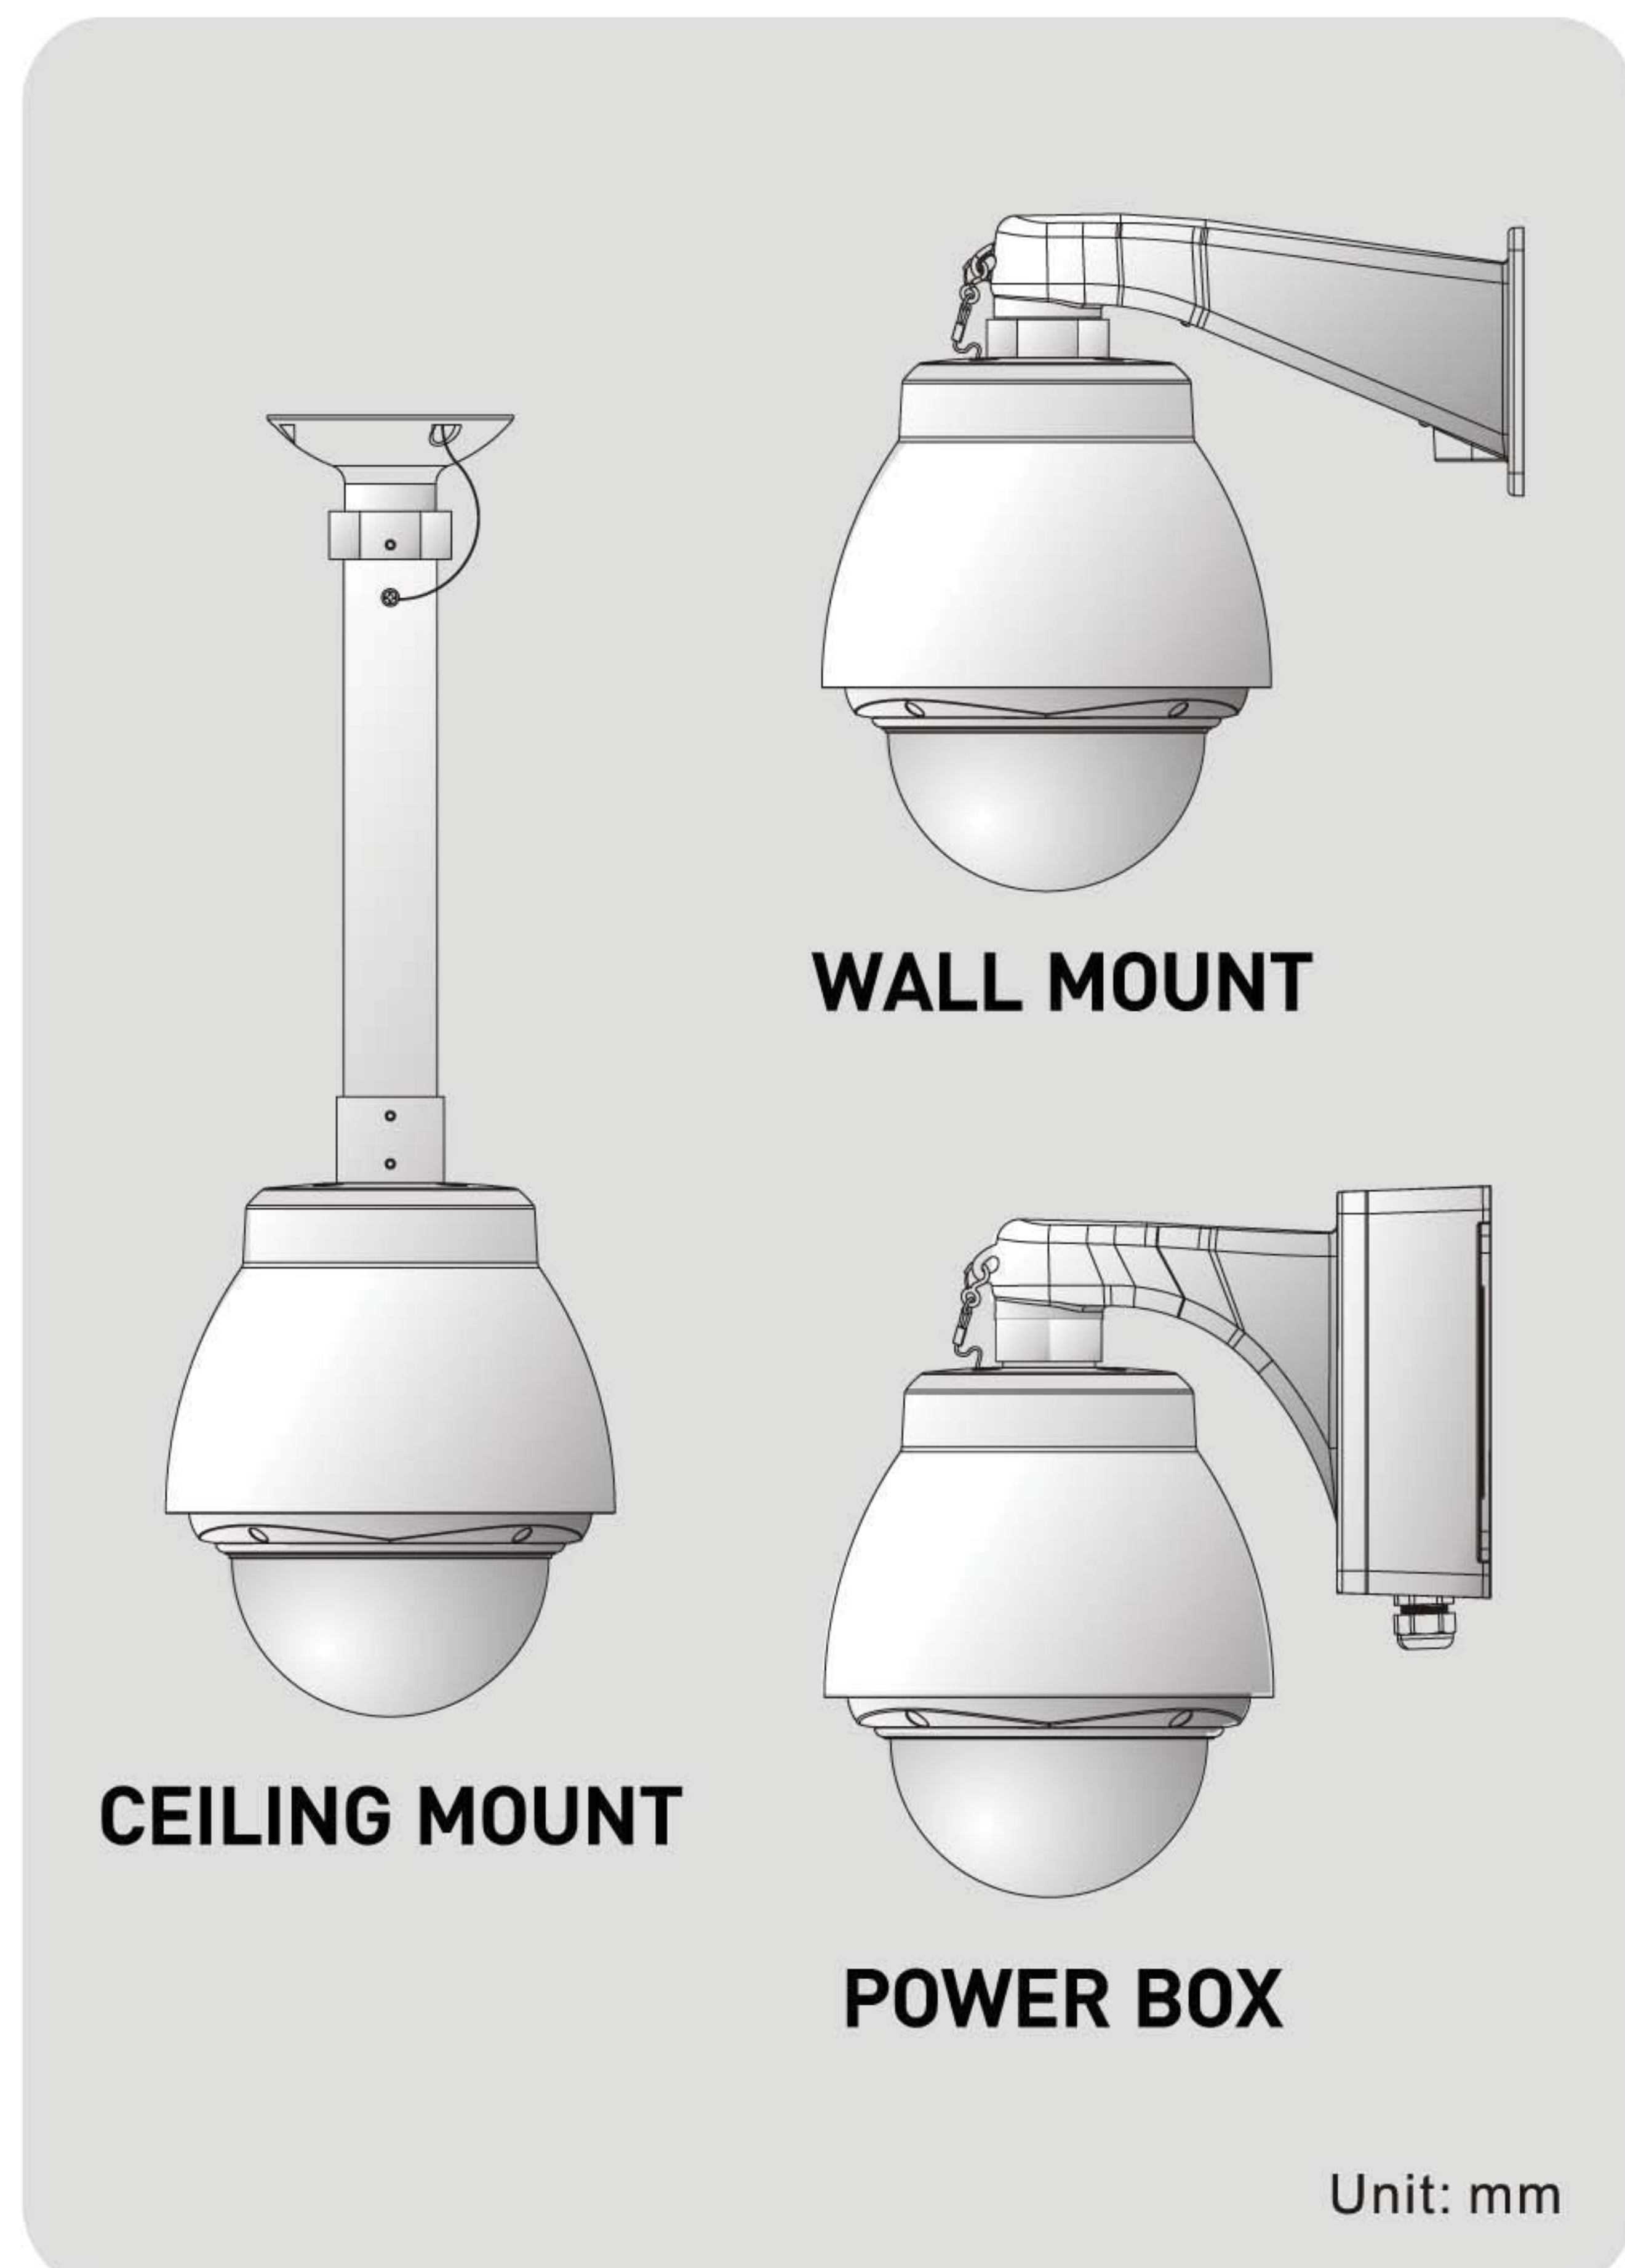

■ DIMENSION

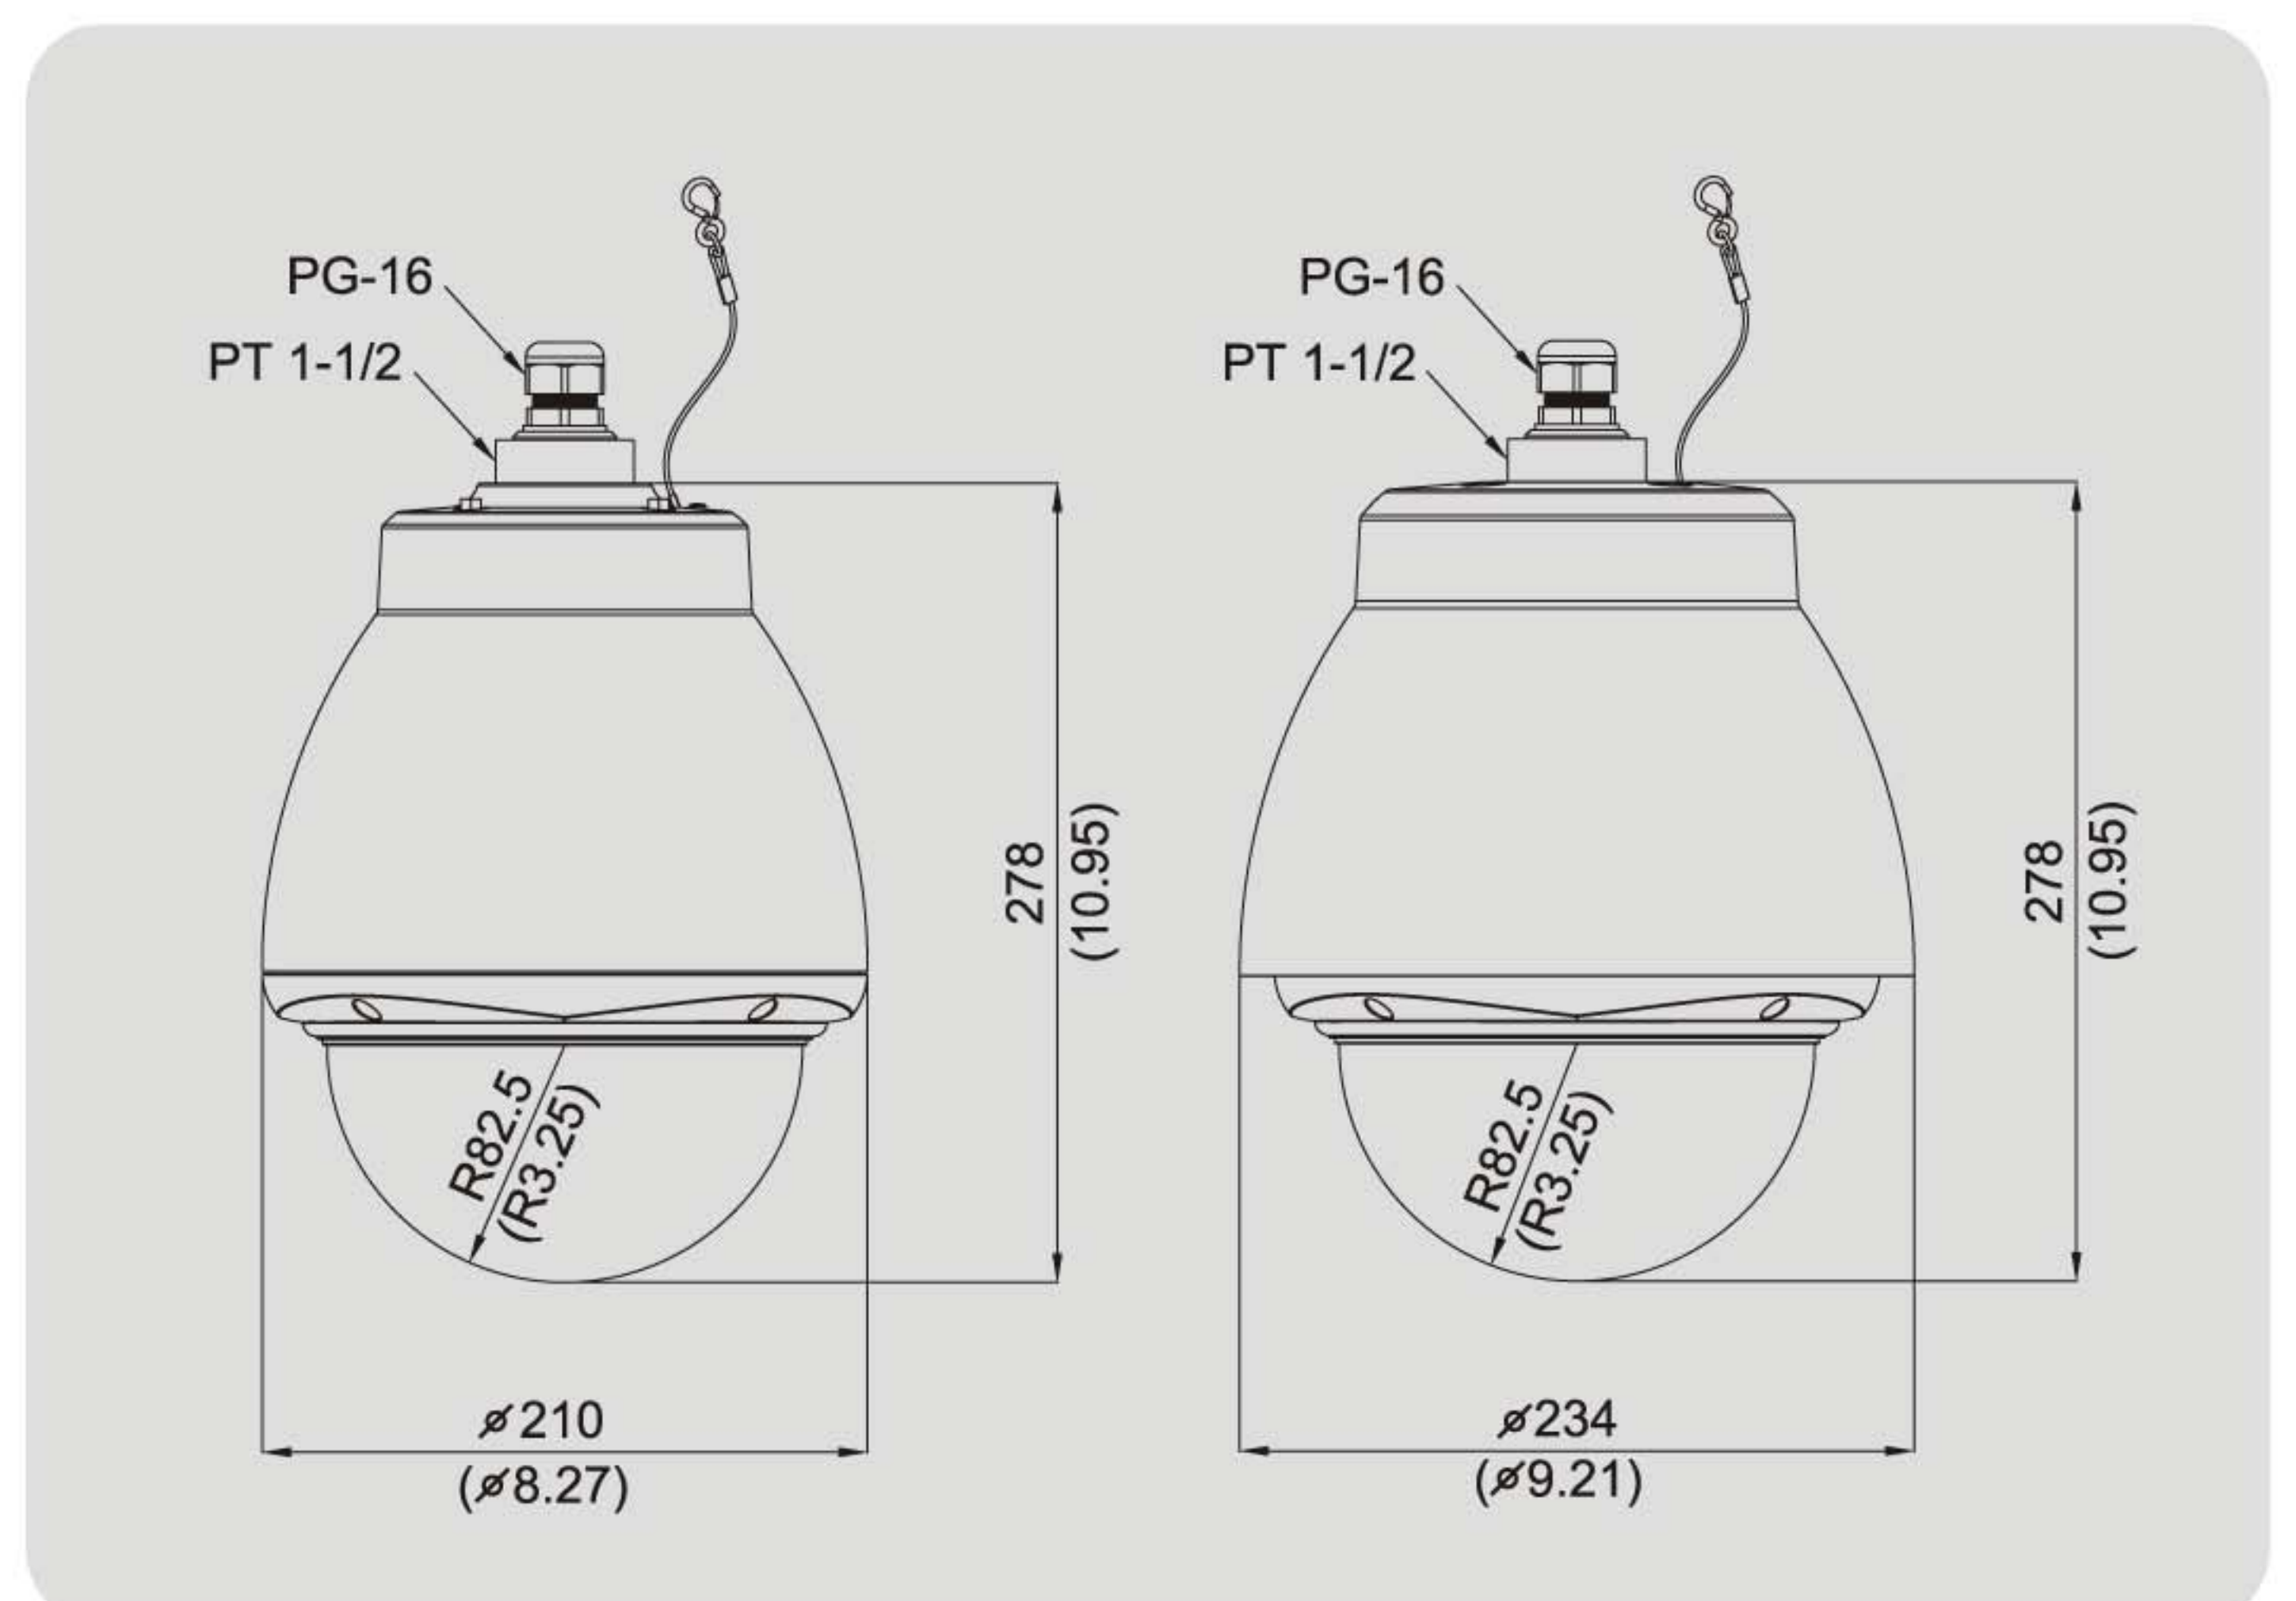

■ ELECTRICAL

Power source	24VAC, 50/60Hz
Power consumption	Heater 50Watts / Blower 3Watts Dome camera 20Watts

■ MECHANICAL

Construction	Aluminum, Steel and Plastic (ABS)
Finish	Polyester powder coat
Dome Bubble	Plastic (Acrylic)
Weight	Approx 5.07 lbs (2.3kg) - w/o Sunshield Approx 6.39 lbs (2.9kg)

SYSCOM video