

## DS-2CE16C8T-IW3Z HD720P Motorized Vari-focal HLC Bullet Camera



### Key Features

- 1.27 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- Low illumination
- 6 – 22mm motorized vari-focal lens
- True Day/Night
- OSD menu, 3D DNR
- IP66 weatherproof
- Up the Coax(HIKVISION-C, Pelco-C Protocol)




## Specifications

<b>Camera</b>	
Image Sensor	1.27MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1305(H)*977(V)
Min. illumination	0.001 Lux @(F1.2,AGC ON), 0 Lux with white light
Shutter Time	1/25(1/30)s to 1/50,000s
Lens	6~22mm motorized VF lens, HFOV 14.4-34.4, VFOV 10.8-25.6, DFOV 18.4-44.9
Lens Mount	φ14
Day & Night	Color
Synchronization	Internal synchronization
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω/BNC)
S/N Ratio	> 62dB
<b>Menu</b>	
Auto Gain	Low/Middle/High/Off
D/N Mode	Color
White Balance	Auto/Manual
Private Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
Exposure Mode	Global Exposure/Digital WDR
3D DNR	Low/Middle/High/Off
Language	English/Chinese
Function	Contrast/Sharpness/Saturation/Mirror/Digital zoom
White Light Control	On/Off/1-5 adjustable level
<b>General</b>	
Operating Conditions	-40°C~60°C (-40 °F ~ 140 °F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC ± 15%
Power Consumption	Max. 5W
Protection Level	IP66
Light Distance	30-40m
Communication	Up the coax, Protocol: Pelco-C(CVBS output), HIKVISION-C(TVI output)
Dimensions	134×116×293mm(5.28×4.57×11.54)
Weight	1600g

## Order Models

DS-2CE16C8T-IW3Z

## Dimensions

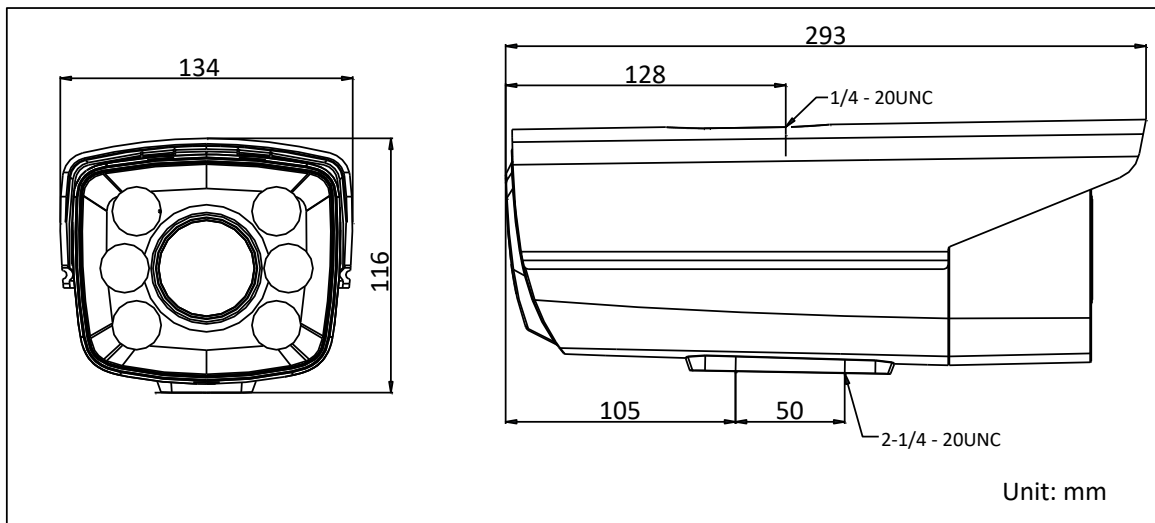

## Accessories



DS-1293ZJ  
Wall Mounting



DS-1214ZJ  
Pole Mounting



DS-1275ZJ  
Pole Mounting



DS-1233  
Column Mounting



DS-1H18  
Video Balun



DS-TT-X41T  
TVI Tester

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

### Hikvision Poland

T +48-22-460-01-50  
poland@hikvision.com

### Hikvision USA

T +1-909-895-0400  
sales.usa@hikvision.com

### Hikvision India

T +91-22-28469900  
sales@pramahikvision.com

### Hikvision UK

T +44-1628-9021-4  
support.uk@hikvision.com

### Hikvision Europe

T +31-23-5542770  
saleseuro@hikvision.com

### Hikvision Italy

T +39-0438-6902  
info.it@hikvision.com

### Hikvision Singapore

T +65-6684-4718  
sg@hikvision.com

### Hikvision Middle East

T +971-4-8816086  
salesme@hikvision.com

### Hikvision France

T +33(0)1-85-330-444  
info.fr@hikvision.com

### Hikvision Oceania

T +61-2-8599-4233  
salesau@hikvision.com

### Hikvision Russia

T +7-495-669-67-99  
saleru@hikvision.com

### Hikvision Spain

T +34-91-737-16-55  
info.es@hikvision.com

### Hikvision Hong Kong

T +852-2151-1761

20150918